



## SMOKE DETECTOR

Brand:

Asenware

Model:

AW-CSD311


TYPE:

Smoke Detector



## GENERAL DESCRIPTION

The detectors are Photo-electronic detector uses a state-of-the-art optical sensing chamber. This detector is designed to provide open area protection and to be used with most conventional fire alarm panel. Two LEDs on each detector provide local 360° visible alarm indication, They flash every 6 seconds indicating that power is applied and the detector is working properly.

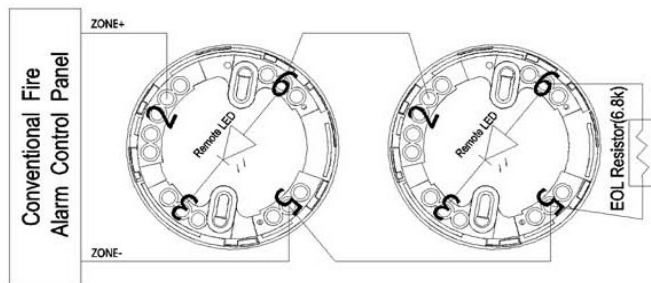

Terminal 6 : IN+ (Zone Input+)

Terminal 5 : IN- (Zone Input-)

Terminal 2 : OUT+ (Zone Output+)

Terminal 5 : OUT- (Zone Output-)

Terminal 6 : Remote Indicator+

Terminal 3 : Remote Indicator-

## SPECIFICATION

ITEM	SPECIFICATION
Model	AW-CSD311
Operating Voltage	9~28V DC
Standby Current	24VDC
Polarization	Non-polarized
Working Environment	-10C to 50C
Alarm Sensitivity	1.06±26%FT
Color	White
Diameter	99.45mm

